




MASTHEAD AMPLIFIER

Specification Sheet

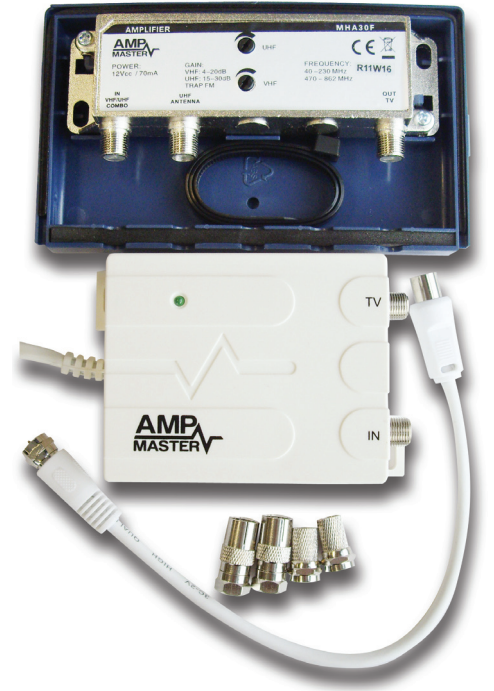

Product Number	Product Name	Product Description	Product Image
Included	power supply	Signal frequency range: 47-862MHz No. of outputs: 1 Signal insertion loss: $\leq \pm 1\text{dB}$ Output voltage: +12V regulated DC(+/-0.6V) Output current rating: 100mA Max Mains power requirement: 220V-240V AC 50Hz at <math>< 3\text{W}</math> Power and status indicator: 2-color LED: green-normal, red-s/c fault	
Standard Packing Info			
Blister			
Packing Info			
Number of Per Carton	48pcs		
Outer Carton Size	41x31x28.5		
Gross/Net Weight/Ctn	18/16KGS		
Product Number	Product Name	Product Description	Product Image
MHA30F	Amplifier	V: 16dB U: 30dB Adj Masthead Amplifier W/FM trap Inputs: 2 ; Output: 1 Operation Frequency: VHF: 47-230MHz UHF: 470-862MHz Gain: VHF: 20dB; UHF: 26dB Gain control: 15dB FM trap: 88-108MHz Rejection: >20dB Isolation: >10dB Flatness: 2dB 12V Requirements: 70mA	
Standard Packing Info			
Blister			
Packing Info			
Number of Per Carton	60PCS		
Outer Carton Size	54.5X33.5X27.5		
Gross/Net Weight/Ctn	18.5/16.5kgs		
Approval Mark	