

SC614020/250

CABLEMASTER (AUST)

Distributed exclusively by Skandia
 131 Wedgewood road
 Hallam 3803
 1300 788 466

Revision History

Part NO: **SC614020/250**

Revision number : AZ-094-2

Product Description

Application:

Security/Automotive/Control cable

Multi-construction

6 Cores

Construction

6 Cores	Tinned Copper
Construction	T0.20±0.008×14
Stranded Dia.(mm)	0.86
Insulation	PVC
Thickness	0.22
Insulation Dia.(±0.05mm)	1.3×6C
Insulation Color	Yellow, White, Green,Black,Blue,Red
Filler	1.3 PVC Strip
Nylon rip Cord	150D
Jacket	PVC
Thickness(mm)	0.65
Dia.(±0.15mm)	5.20
Jacket Color	Grey(RAL7001)

Marking (Black ink)

CABLEMASTER SC614020 N2020 250M.....000M


PACKAGING

250M/Easy reel Box

CABLEMASTER SC614020
 RoHS(2002/95/EC)
 250 METERS

www.cablemasteraustralia.com.au

Design

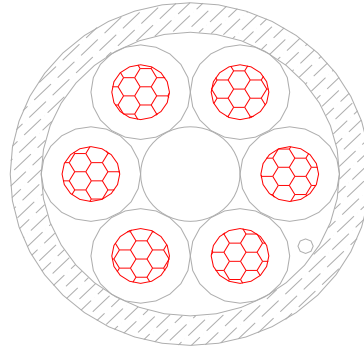

Electrical Characteristics

Max.Conductor DC Resistance at 20°C (Ω /Km)	42.3
Rated Temperature(°C)	80
Rated Voltage(V)	300
Min.Insulation DC Resistance at 20°C (M Ω *KM)	>200

RoHS GUIDELINE

We operate according to the following standards

Control Item	Standard	Testing Method	Testing Equipment
Cadmium content (Cd)	<0.01%	EN1122	ICP-AES
Lead content (Pb)	<0.1%	EPA3050B	ICP-AES
Mercury content (Hg)	<0.1%	EPA3052	ICP-AES
Chromium (VI) content	<0.1%	EPA3060(UN-VIS)	ICP-AES
Polybrominated Biphenyls(PBB)	Forbidden	GC/MS	
Polybrominated Diphenyl Ether (PBDE)	Forbidden	GC/MC	

