

SWDI-1.0

CABLEMASTER (AUST)

Distributed exclusively by SKANDIA
131 Wedgewood road Hallam 3803
1300 788 466

Revision History

Part NO: SWDI-1.0	Price NO:
Prepared by: CXY	Date: 2015/6/29
Approved by:	Page: 1 of 1

Product Code: Speaker Cable 2x0.75

Product Description

Application:

For general purpose power supply cord.

Reference Standard

Customer's sample spec. and the general standard

Multi-construction

2 Core

Cable Construction

1. Conductor	Bare Copper
Construction	0.19±0.008x24
2. Insulation	PVC
Insulation Dia.(mm)	2.0±0.10×2C
Insulation color	Red, Black
3. Filler	Chalk
4. Jacket	Soft PVC
Dia.(mm)	5.80±0.20
Jacket Color	Black

Marking


PACKAGING

100M/Plastic Reel

Label

CABLEMASTER Commercial Speaker
Cable 2x0.75 Soft PVC Black
RoHS2(2011/65/EU)
100M

Design

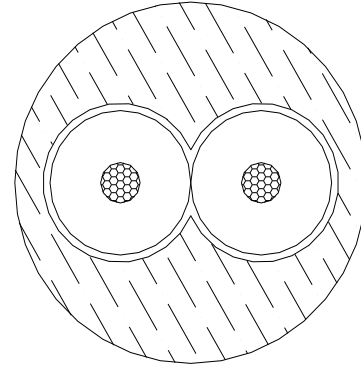

Electrical Characteristics

Max. Conductor DC Resistance at 20°C (Ω/Km)	<27.4
Rated Temperature(°C)	80
Rated Voltage(V)	300
20°C Insulation Resistance(MΩ.KM)	>200

