

8723 PVC

CABLEMASTER (AUST)

Distributed exclusively by : Skandia

131 Wedgewood road Hallam 3803

1300 788 466

Revision History

Revision No: AZ-152-2	Price NO:
Prepared by: CXY	Date: 2016/8/18
Approved by:	Page: 1 of 1

Product Code: 2PR22AWG

Product Description

Application:

Multi-Conductor-Audio, Control, & Instrumentation Cables

Reference Standard

Customer's sample spec. and the general standard

Multi-construction

2 Pair

Cable Construction

1. Conductor	Tinned Copper
Construction	T0.25±0.008 x 7
Stranded Dia	0.76
2. Insulation	HDPE
Thickness	0.22
Insulation Dia.(mm)	1.20±0.10×2C
Insulation Color	Black/Red White/Green
3. Al-Pet Shield (on each pair)	≥115%
4. Total Drain wire	Tinned Copper
Construction	T0.19±0.008 x 7
5. Jacket	PVC
Thickness(mm)	0.5
Dia.(mm)	4.20±0.20
Jacket Color	Grey(RAL7001)

Marking

DDMMYY CABLEMASTER 2PR 4 core shielded 22AWG 7x30 001M.....100M

DDMMYY=Production date

PACKAGING


100M/ Plastic Reel

300M/Wooden Reel

Label

8723 PVC
RoHS(2002/95/EC)
100M

Design

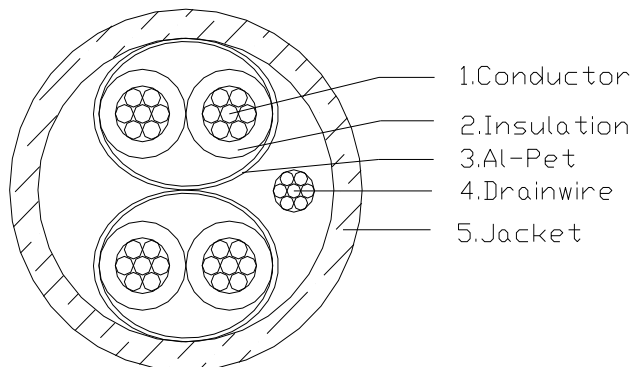

Electrical Characteristics

Max. Conductor DC Resistance at 20°C (Ω/Km)	<54.2
Rated Temperature(°C)	80
Rated Voltage(V)	300
20°C Insulation Resistance(MΩ.KM)	>200

