

SC714020

CABLEMASTER (AUST)

Distributed exclusively by SKANDIA

Revision History

Part NO: AZ-150-2	Price NO: AZ-0141
Prepared by: CXY	Date: 2016/6/22
Approved by:	Page: 1 of 1

Product Code: SC714020

Product Description

Application:

For internal or external wiring of warning network systems.

Reference Standard

Customer's sample spec.and the general standard

Multi-construction

7 Core

Cable Construction

1.Conductor Bare Copper

Construction 0.19±0.008×14
Stranded Dia.(mm) 0.82

2.Insulation PVC

Thickness 0.29
Insulation Dia.(mm) 1.40±0.10×7C

Insulation Color **White (Center)**
Yellow,Black,Brown,
Blue ,Red,Green

3.Drain wire Tinned Copper

Construction(mm) T0.19±0.008×7

4.AI-Pet Shield(Blue Color) ≥115%

5.Jacket PVC

Thickness 0.75
Dia.(mm) 6.25±0.20
Jacket Color **Grey (Same as customer sample col)**

Marking (Ink Black,one per meter)

DDMMYY E273 CABLEMASTER SC714020 100M.....00

Production date=DDMMYY


PACKAGING

100M/Wooden Reel

Label

CABLEMASTER SC714020
RoHS(2002/95/EC)
100M

Design

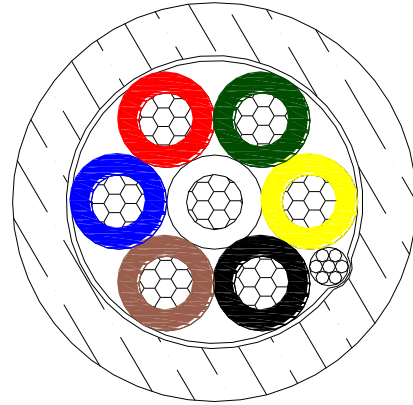

Electrical Characteristics

Max.Conductor DC Resistance at 20°C (Ω/Km)	<46.9
Rated Temperature(°C)	80
Rated Voltage(V)	300
20°C Insulation Resistance(MΩ.KM)	> 200

Revise record:

AZ-150-2 2016-06-22 Add AI-Pet Color,Marking and Label

